


# BRICKMAN

# BRICKMAN

## 300 ALUMINUM & SHREDDED PAPER

**THIS VERSION OF BRICKMAN 300 WITH EXTENDED CYLINDER IS DESIGNED FOR EFFECTIVE COMPACTION OF ALUMINIUM MATERIAL SUCH AS CANS & CHIPS, SHREDDED PAPER AND PAPER OFFCUTS IN GRAPHIC INDUSTRY.**

The automated solution is time-saving and convenient. Due to a small footprint and low sound emission, Brickman 300 can be placed indoors close to the source of waste.

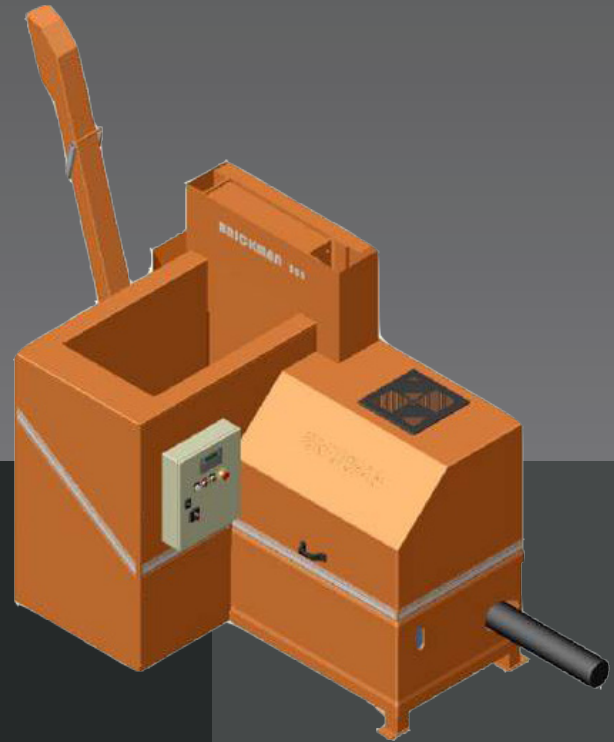

### Automatic solution



**300** KG/H

CAPACITY  
ALUMINIUM CHIPS &  
SHREDDED PAPER

### Orwak benefits

#### MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

#### MORE SPACE & ORDER

Our balers rapidly minimizes the space the waste takes up, keeping aisles free and tidy.

#### LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions. Sorting at source yields a higher quality of waste material for recycling.



### Why Brickman?

- + Convenient fully automated compaction solution
- + Impressive volume reduction of up to 20:1
- + Placement opportunities indoors



# BRICKMAN

## 300 ALU & SHREDDED PAPER



### BRICKMAN 300 ALU & SHREDDED PAPER IS OPTIMIZED FOR:

#### ALUMINUM

- + Aluminum cans
- + Aluminum chips

#### CAPACITY

- up to 160 kg/h
- up to 300 kg/h

#### PAPER

- + Shredded paper up to 300 kg/h

### DESIGNED FOR ALU AND SHREDDED PAPER

Thanks to the following features, this sturdy version of Brickman 300 is especially designed for compaction of aluminum cans, shredded paper and paper offcuts:

- + Extension on press cylinder
- + Automatic greasing of the press plate

### OPTIONAL ACCESSORIES

Brickman 300 can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices.

### CONVENIENT AND EFFICIENT

Brickman offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding. Furthermore, optional photocells can automate the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.

### GREAT LOGISTICS

Thanks to Brickman's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.


## DIMENSIONS & SPECIFICATIONS

### DIMENSIONS (MM)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
2270	1950	Ø145	425	1360	1500	1880	850	2190	660	3700	140	950	210	245	840	1440	600

### DIMENSIONS (MM)

S	T
825	1100

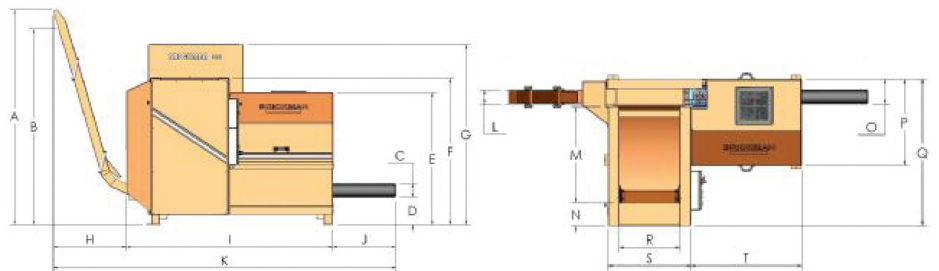

### TECHNICAL SPECIFICATIONS

MACHINE WEIGHT	PRESS FORCE	PRESSURE	HOPPER	BRIQUETTE SIZE	DENSITY	NOISE LEVEL	OPERATING POWER
1600 kg	25 ton, 250 kN	Up to 500 kg/cm <sup>2</sup>	0.75 m <sup>2</sup>	80x80x100-300 mm	Up to 1200 kg/m <sup>3</sup>	68 db (A)	400 V, 3-phase, 50 Hz** Fuse: 25 A (slow) Engine: 7.5 kW Voltage: 24 V Protec. class: IP 55

We reserve the right to make changes to specifications without prior notice. \* Density varies with type of material. \*\* Other voltages are available