

# ORWAK

## FLEX 5030-NHD

FLEX

### THIS SPECIAL VERSION OF THE ORWAK

**FLEX 5030** provides you with a safe way of compacting hazardous waste directly into drums.



## Safety



## Orwak benefits

### MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

### MORE SPACE & ORDER

Our balers rapidly minimizes the space the waste takes up, keeping aisles free and tidy.

### LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions. Sorting at source yields a higher quality of waste material for recycling.



## Why Orwak Flex?

- + Versatile compaction for many different application areas
- + Hygienic and safe compaction and disposal of mixed or hazardous waste
- + Special solutions for special needs

[www.orwak.com](http://www.orwak.com)

**ORWAK**<sup>®</sup>  
PART OF **SULO** GROUP

# ORWAK

## FLEX 5030-N HD

### Safe waste handling

**ORWAK FLEX 5030-N HD IS OPTIMIZED FOR:**

**OTHER MATERIAL**

+ Hazardous waste

ORWAK FLEX 5030-N HD, a robust and reliable compactor, the handling, transportation and disposal of chemical waste becomes safe and simple. It compacts hazardous waste, such as glass and cans/tins containing residual paint, oil or chemicals directly into drums.

**HIGH COMPACTION RATIO ON THE SPOT**

The 5030-N HD is a compact machine with a small footprint, but even though it requires little space, it still offers a high compaction ratio of up to 10:1!

**STEEL PALLET**

A steel pallet is included for stable placement of the drum inside the compactor. The operator effortlessly handles the heavy-duty steel pallets using a standard pallet lifter.

Standard drums can be used for storage and transport of the hazardous waste. Sorting is possible by using several drums.



**USER FRIENDLY**

It is easy to feed material into the open top-loading unit. The compactor is safe and simple to operate.




## DIMENSIONS & SPECIFICATIONS

**DIMENSIONS ORWAK FLEX 5030-N HD**

A	B	C	D	E
2165 mm	850 mm	1290 mm	2030 mm	1320 mm

**ENERGY CONSUMPTION**

STANDBY MODE	MAXIMUM OPERATION ONE HOUR
---	660 W/H

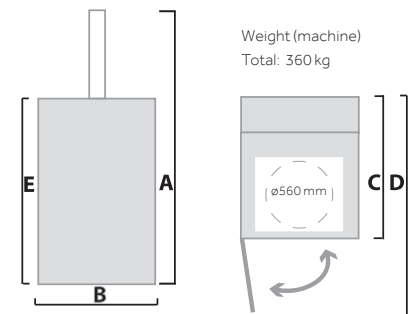

**TECHNICAL SPECIFICATIONS**

LOADING APERTURE	CYCLE TIME	PRESS FORCE	DRUM SIZE	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
ø 560 mm	36 secs	3 ton, 30 kN	Width: ø600 mm Height: 1005 mm	70 db (A)	IP 55	Single phase 230 V, 50 Hz, 10 A

We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.

Orwak AB  
Svetsaregatan 4  
S-576 33 Sävsjö  
SWEDEN  
Tel: +46-(0)382-157 00  
info@orwak.com, www.orwak.com

