

ORWAK FLEX 5010-E

The ORWAK FLEX 5010-E is a small but tough baler, that requires little space but offers effective compaction. The unit is sturdy, reliable and easy to operate.



**SMALL
FOOTPRINT**



**60 KG
BALE WEIGHT
CARDBOARD**

ORWAK BENEFITS



MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.

WHY ORWAK FLEX?

- Versatile compaction for many different application areas
- Hygienic and safe compaction and disposal of mixed or hazardous waste
- Special solutions for special needs


PART OF **Julo** GROUP

ORWAK FLEX 5010-E

Small but tough

TOP LOADING

Feeding material into this top-loading baler is fast and convenient, and the compaction ratio is impressive thanks to high pressure on a small surface.

VERSATILE

The design means that the compactor is versatile and can be used for baling waste products such as cardboard, paper, plastic and even thin wood packaging.

COMPACT DESIGN

Thanks to its compact design, the baler fits where you need it to be and is easy to install in any location.

BALE TROLLEY INCLUDED

Model 5010-E is always delivered with a bale trolley for effortless baling and smooth internal transportation of the bale.



ORWAK FLEX5010-E IS OPTIMIZED FOR:

PAPER

- Cardboard
- Shredded paper
- Paper sacks

PLASTIC FOIL

- Shrink film
- Plastic bags

OTHER METALS

- Metal straps

OTHER PLASTICS

- Plastic straps


DIMENSIONS & SPECIFICATIONS

DIMENSIONS

A	B	C	D	E
2140 mm	910 mm	1110 mm	1820 mm	1295 mm

ENERGY CONSUMPTION

STANDBY MODE	MAXIMUM OPERATION ONE HOUR
---	660 W/H

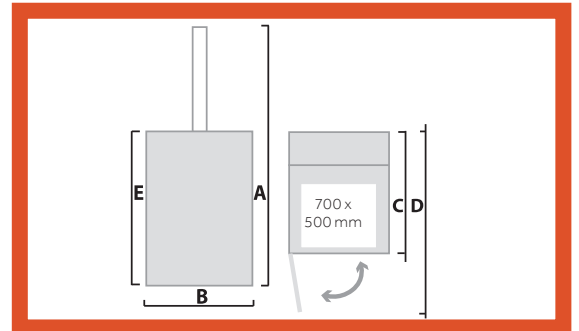

TECHNICAL SPECIFICATIONS

LOADING APERTURE	CYCLE TIME	PRESS FORCE	BALE SIZE	BALE WEIGHT	MACHINE WEIGHT	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
Width: 700 mm Depth: 500 mm	36 secs	3 ton, 30 kN	Width: 700 mm Depth: 500 mm Height: 700 mm	Cardboard: Up to 60 kg Plastic: Up to 80 kg	370 kg	70 db (A)	IP 55	Single Phase 230 V, 50 Hz, 10 A

We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.

ORWAK AB

Svetsaregatan 4
S-576 33 Sävsjö
SWEDEN
Tel: +46-(0)382-15700
info@orwak.com

ORWAK.COM

ORWAK
PART OF fulo GROUP